

# Ikelite DS51/AF35 Battery Door


## Installation and Care

#9440.45 (Clear)

### Installation

- Make sure battery door o-ring is properly seated in the channel of the door. Make sure o-ring and channel are clean and free of dirt or debris. If necessary, wipe o-ring clean with a paper towel or lint-free cloth.
- Align notch in battery door with notch in strobe battery compartment.
- Firmly snug the battery door into the strobe battery compartment post by turning the Knob "clockwise". Do not cross-thread or over-tighten. Look for a solid black line to appear around the perimeter of the o-ring as you tighten the battery door.

**NOTES:** Lubricating the o-ring will NOT result in a better "seal" to the strobe and is not recommended.  
The o-ring is seated in the battery door channel and does not need to be removed. Frequent removal of the o-ring can increase the risk of dirt or debris getting into the o-ring channel and causing a leak.

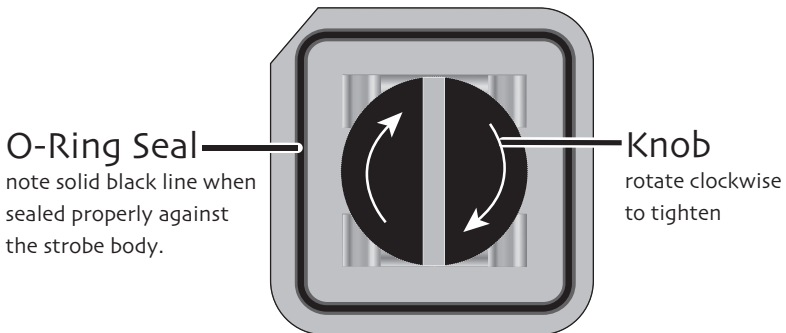

Ikelite Underwater Systems  
50 West 33rd Street  
Indianapolis, IN 46208

General questions e-mail: [ikelite@ikelite.com](mailto:ikelite@ikelite.com)

317-923-4523

[www.ikelite.com](http://www.ikelite.com)

DS51/AF35 Clear Battery Door\_9440.45-01-0909